


GN3000 // -D

DIRECT-DRIVE HIGH-SPEED OVERLOCK & SAFETY-STITCH SEWING MACHINE
HOCHLEISTUNGS-, OVERLOCK- UND SICHERHEITNAHT-NÄHMASCHINE MIT DIREKTANTRIEB

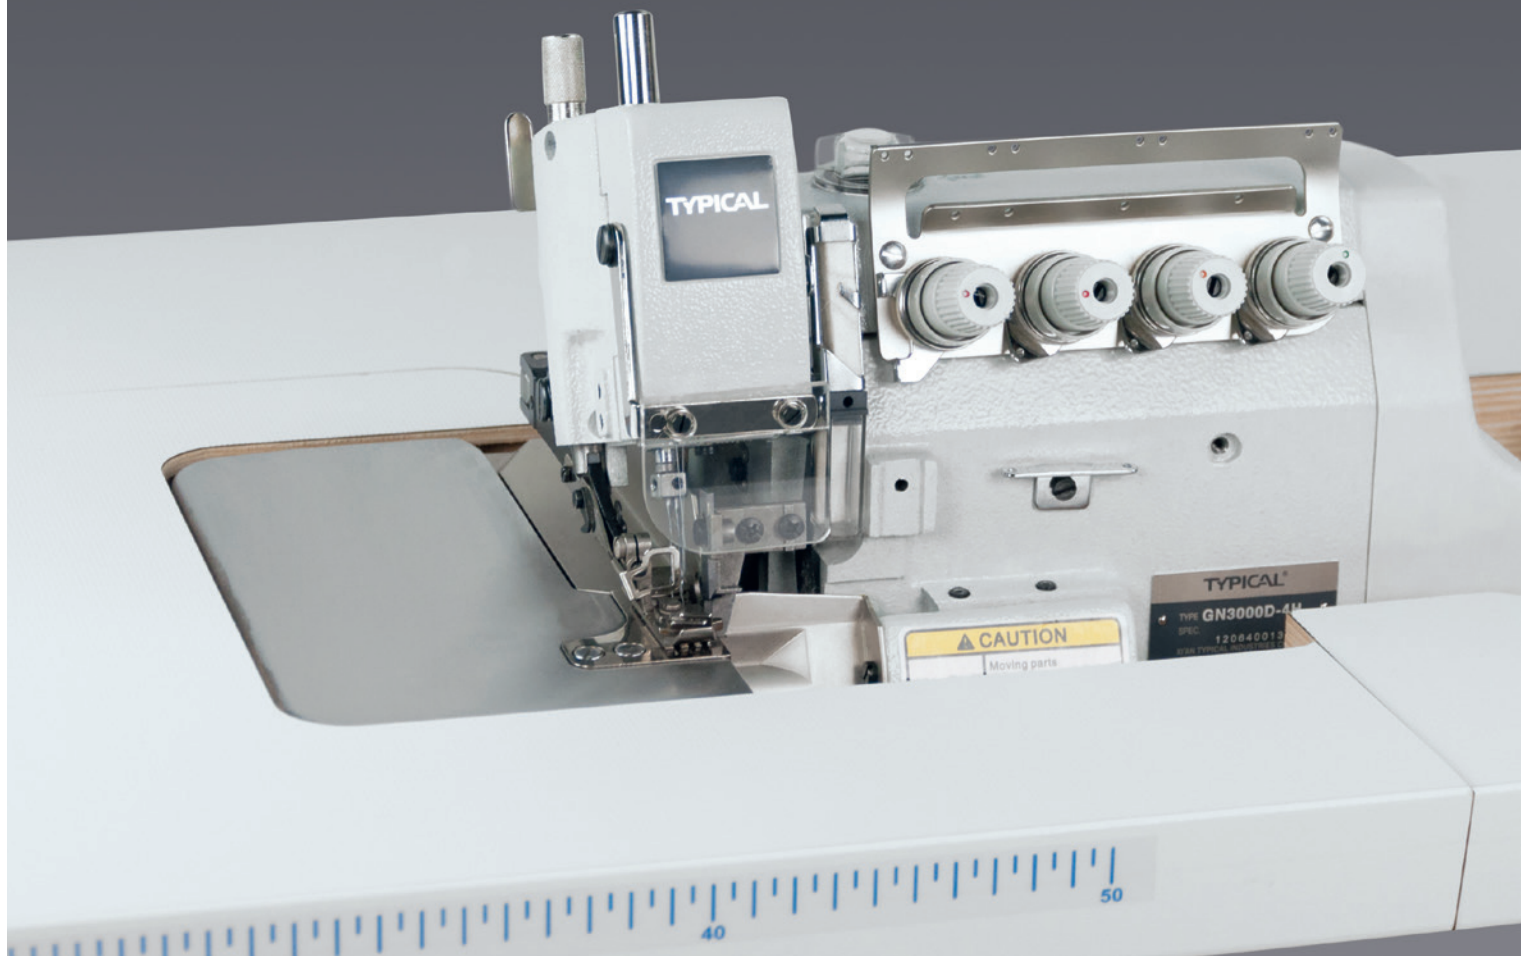

TYPICAL

EN Technical Data

- Differential drop feed with fast adjustment
- Color-coded thread guide for easy threading
- Synchronized needle guard on looper carrier for continuous seam quality
- Fully automatic lubrication system with oil filter
- Push-button stitch length regulator
- Balance wheel 55 mm eff. Dia.

GN3000D

- Integrated direct-drive (550 Watt) for extreme smooth and vibration free machine running (**GN3000D**)
- Reduction of energy consumption
- Easier & faster to build up a complete machine

Models

- **GN3000-/ GN3000D-3** 1 needle, 3 thread;
 - **GN3000-/ GN3000D-4** 2 needle, 4 thread;
 - **GN3000-/ GN3000D-5** 2 needle, 5 thread;
 - **GN3000-/ GN3000D-6** 3 needle, 6 thread;
- Stitch type 514 + 401

Carton dimensions & gross weights for sewing head

48×37×47 cm, 34 kg

* for rolled hem

2* with angled edge knife for extra heavy duty materials

3* with angled edge knife for extra heavy duty materials & adjustable tape guide in sewing foot

4* with thread clamp for back latch function

Specifications can differ depending on model.

DE Technische Daten

- Differential-Untertransport mit Schnellverstellung
- Farbmarkierte Fadenführungen erleichtern das Einfädeln
- Mitgehender Nadelschutz am Greiferträger sichert eine durchgängige Nahtqualität
- Vollautomatische Druckumlaufschmierung mit Ölfilter
- Druck-Knopf-Stichsteller
- Handrad-Durchmesser effektiv: 55 mm

GN3000D

- Integrierter 500 Watt Direktantrieb sorgt für extrem ruhigen und vibrationsfreien Maschinenlauf (**GN3000D**)
- Reduzierter Energieverbrauch
- Enorme Zeitersparnis beim Montieren der Komplettmaschine

Ausführungen

- **GN3000-/ GN3000D-3** 1-Nadel, 3 Faden;
 - **GN3000-/ GN3000D-4** 2-Nadel, 4 Faden;
 - **GN3000-/ GN3000D-5** 2-Nadel, 5 Faden;
 - **GN3000-/ GN3000D-6** 3-Nadel, 6 Faden;
- Stichtyp 514 + 401

Kartonmaße & Brutto-Gewichte für Nähkopf

48×37×47 cm, 34 kg

* für Rollsaum

2* mit Winkelkantenmesser für extra schwere Materialien

3* mit Winkelkantenmesser für extra schwere Materialien & verstellbarer Bandführung im Nähfuß

4* mit Fadenklemme für Nahtfangsverriegelung

Angaben können je nach Ausführung abweichen.



Model	Needle	Thread	Stitch Length	Stitch Width	Stitch Density	Stitch Type	Stitch Length	Stitch Width	Stitch Density	Stitch Type	
GN3000-3 GN3000D-3	B*	504	7,000	0.7–1.7	0.5–3.8	4	1	3	–	5.5	
											1.5
GN3000-4 GN3000D-4	H	514	6,500	0.7–1.7	0.5–3.8	4	2	4	2	6	
	H-A ^{3*}									6	
	C ^{4*}									6.5	
GN3000-5 GN3000D-5	(3×5)	516	6,500	0.7–1.7	0.5–3.8	5	2	5	3	5.5	
	(5×5)		6,500	0.7–1.7	0.5–3.8	5				5	5.5
	5H		5,500	0.6–1.3	0.6–5.3	6				5	6
	5H-A ^{2*}		5,500	0.6–1.3	0.6–5.3	6				5	6
GN3000-6 GN3000D-6	(3×2×4)	514 + 401	6,500	0.7–1.7	0.5–3.8	4	3	6	3 + 2	5.5	

XI'AN TYPICAL EUROPE GmbH

Hertelsbrunnenring 9
D-67657 Kaiserslautern
Tel.: +49 (0)631 316019-0
Fax: +49 (0)631 316019-11

E-mail: sales@typical-europe.com
www.typical-europe.com

